



DOIN ELECTRIC

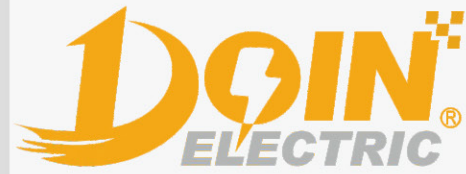


DEXIN ELECTRIC TECHNOLOGY


www.doinele.com

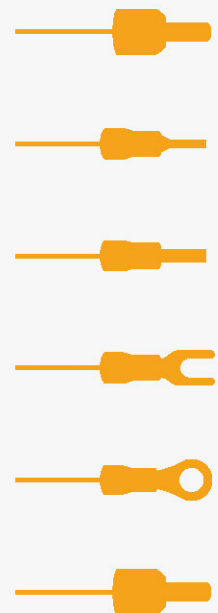

Pre-insulated Ring terminals

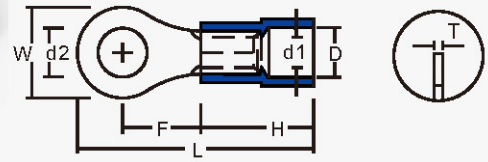

Available range	Stud Size	Single Grip	Double Grip	American	Dimensions (mm)			
					d2	W	F	L
Cross-section: 0.75-1.5mm² A.W.G.: 22-16 I_{max}=19A Insulator colour: Red Surface handling: Tin / 3μ Annealing: Yes	M3	RV1.25-3.2	RVD1.25-3.2	#4	3.2	5.5	5.00	17.5
	M3.5	RV1.25-3.7S	RVD1.25-3.7S	#6	3.7			
	M3.5	RV1.25-3.7M	RVD1.25-3.7M	#6	3.7	6.6	6.3	19.4
	M3.5	RV1.25-3.7L	RVD1.25-3.7L	#6	3.7	8.0	7.0	20.8
	M4	RV1.25-4S	RVD1.25-4S	#8	4.3	6.6	6.3	19.4
	M4	RV1.25-4L	RVD1.25-4L	#8	4.3	8.0	7.0	20.8
	M5	RV1.25-5	RVD1.25-5	#10	5.3			
	M5	RV1.25-5L	RVD1.25-5L	#10	5.3	11.6	11.0	26.8
	M6	RV1.25-6	RVD1.25-6	1/4"	6.4	11.6	11.0	26.8
	M8	RV1.25-8	RVD1.25-8	5/16"	8.4	11.6	11.0	27.0
	M8	RV1.25-8L	RVD1.25-8L	5/16"	8.5	13.6	13.9	30.7
	M10	RV1.25-10	RVD1.25-10	3/8"	10.5	13.6	13.9	30.5
M12	RV1.25-12	RVD1.25-12	1/2"	13.0	19.2	16.0	35.4	
Cross-section: 1.5-2.5mm² A.W.G.: 16-14 I_{max}=27A Insulator colour: Blue Surface handling: Tin / 3μ Annealing: Yes	M3	RV2-3.2	RVD2-3.2	#4	3.2	6.6	4.8	17.8
	M3.5	RV2-3.7	RVD2-3.7	#6	3.7	5.5	5.6	
	M3.5	RV2-3.7M	RVD2-3.7M	#6	3.7	6.6	6.3	19.4
	M3.5	RV2-3.7L	RVD2-3.7L	#6	3.7	8.5	7.40	21.8
	M4	RV2-4S	RVD2-4S	#8	4.3	6.6	6.3	19.4
	M4	RV2-4L	RVD2-4L	#8	4.3	8.5	7.80	21.8
	M5	RV2-5S	RVD2-5S	#10	5.3			
	M5	RV2-5L	RVD2-5L	#10	5.3	9.5	7.3	21.8
	M6	RV2-6	RVD2-6	1/4"	6.4	12.0	11.0	26.8
	M8	RV2-8	RVD2-8	5/16"	8.4	12.0	11.0	26.8
	M8	RV2-8L	RVD2-8L	5/16"	8.5	13.6	13.9	30.7
	M10	RV2-10	RVD2-10	3/8"	10.5	13.6	13.9	30.5
M12	RV2-12	RVD2-12	1/2"	13.0	19.2	16.0	35.4	
Cross-section: 2.5-4mm² A.W.G.: 14-12 I_{max}=37A Insulator colour: Black Surface handling: Tin / 3μ Annealing: Yes	M4	RV3.5-4	RVD3.5-4	#8	4.3	8.0	8.0	25.0
	M5	RV3.5-5.5S	RVD3.5-5.5S	#10	5.3			
	M5	RV3.5-5.5L	RVD3.5-5.5L	#10	5.3	12.0	9.4	28.4
	M6	RV3.5-6	RVD3.5-6	1/4"	6.4			
	M8	RV3.5-8	RVD3.5-8	5/16"	8.5	15.0	13.5	34.0
	M10	RV3.5-10	RVD3.5-10	3/8"	10.5			
	M12	RV3.5-12	RVD3.5-12	1/2"	13.0	19.2	16.0	38.6
Cross-section: 4-6mm² A.W.G.: 12-10 I_{max}=48A Insulator colour: Yellow Surface handling: Tin / 3μ Annealing: Yes	M3	RV5.5-3.2	RVD5.5-3.2	#4	3.2	7.2	5.9	22.5
	M3.5	RV5.5-3.7	RVD5.5-3.7	#6	3.7	7.2	6.1	22.7
	M4	RV5.5-4S	RVD5.5-4S	#8	4.3	7.2	6.1	22.7
	M4	RV5.5-4L	RVD5.5-4L	#8	4.3	9.5	8.30	26.0
	M5	RV5.5-5	RVD5.5-5	#10	5.3			
	M6	RV5.5-6	RVD5.5-6	1/4"	6.4	12.0	10.5	29.5
	M8	RV5.5-8	RVD5.5-8	5/16"	8.4	15.0	13.3	34.0
	M10	RV5.5-10	RVD5.5-10	3/8"	10.5			
	M12	RV5.5-12	RVD5.5-12	1/2"	13.0	19.2	16.0	38.6





H=10.0 D=4 d1=1.7 T=0.75

H=10.0 D=4.5 d1=2.3 T=0.8

H=13.0 D=6.3 d1=3 T=1.0

H=13.0 D=6.4 d1=3.4 T=1.0

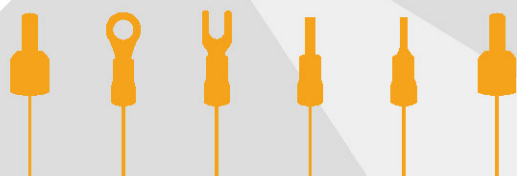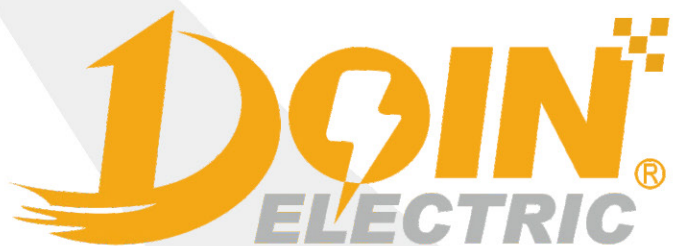

WENZHOU DEXIN ELECTRICTECHNOLOGY CO., LTD

www.doinele.com

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.