



# DOIN ELECTRIC

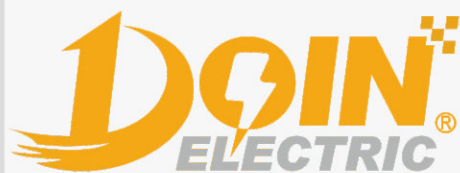


DEXIN ELECTRIC TECHNOLOGY

[www.doinele.com](http://www.doinele.com)


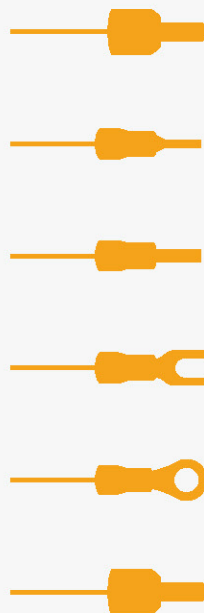


# Bullet and Socket connectors

## Female type

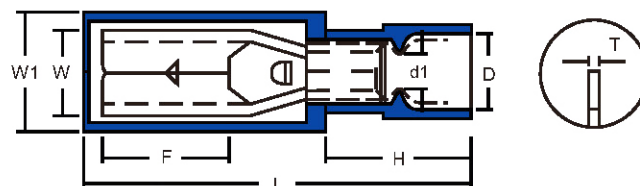

| Available range                                                                                                                                                                                                                                                                             | Single Grip | Double Grip  | Dimensions(mm) |     |      |     |     |      |      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------|----------------|-----|------|-----|-----|------|------|
|                                                                                                                                                                                                                                                                                             |             |              | W              | W1  | L    | H   | d1  | D    | T    |
| <b>Cross-section: 0.75-1.5mm<sup>2</sup></b><br><b>A.W.G.: 22-16</b><br><b>I<sub>max</sub>=10A</b><br><b>Surface handling: Tin / 3μ</b><br><b>Insulator colour: Red</b><br><b>Insulator: PVC / PA66</b>                                                                                     | FRD1.25-156 | FRDD1.25-156 | 3.9            | 7.0 | 23.0 | 1.7 | 3.8 | 4.0  | 0.4  |
|  <b>Cross-section: 1.5-2.5mm<sup>2</sup></b><br><b>A.W.G.: 16-14</b><br><b>I<sub>max</sub>=15A</b><br><b>Surface handling: Tin / 3μ</b><br><b>Insulator colour: Blue</b><br><b>Insulator: PVC / PA66</b> | FRD2-156    | FRDD2-156    | 3.9            | 7.0 | 23.5 | 2.3 | 4.3 | 4.5  | 0.4  |
|                                                                                                                                                                                                                                                                                             | FRD2-195    | FRDD2-195    | 4.9            | 7.0 | 24.5 | 2.3 | 4.3 | 4.5  | 0.4  |
| <b>Cross-section: 4-6mm<sup>2</sup></b><br><b>A.W.G.: 12-10</b><br><b>I<sub>max</sub>=24A</b><br><b>Surface handling: Tin / 3μ</b><br><b>Insulator colour: Yellow</b><br><b>Insulator: PVC / PA66</b>                                                                                       | FRD5.5-156  | FRDD5.5-156  | 4.9            | 7.0 | 24.0 | 3.4 | 5.6 | 5.50 | 0.45 |
|                                                                                                                                                                                                                                                                                             | FRD5.5-195  | FRDD5.5-195  | 4.9            | 7.0 | 24.0 | 3.4 | 5.1 | 5.50 | 0.45 |

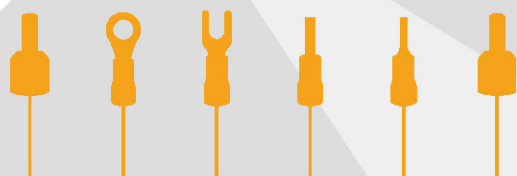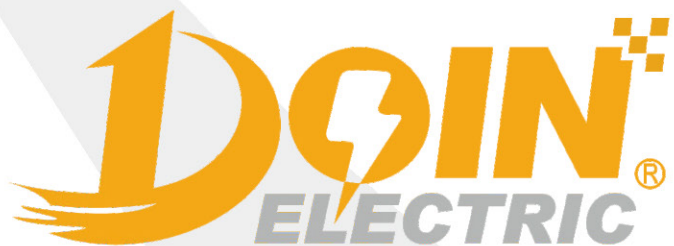

WENZHOU DEXIN ELECTRICTECHNOLOGY CO., LTD

---

[www.doinele.com](http://www.doinele.com)

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.