



DOIN ELECTRIC

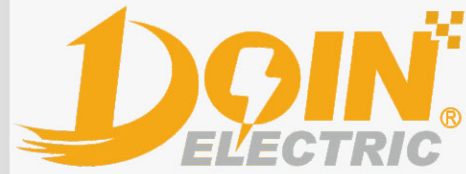


DEXIN ELECTRIC TECHNOLOGY



www.doinele.com

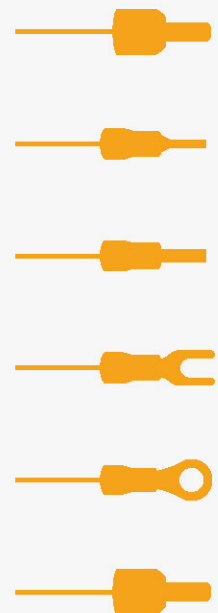

Pre-insulated Pin terminals

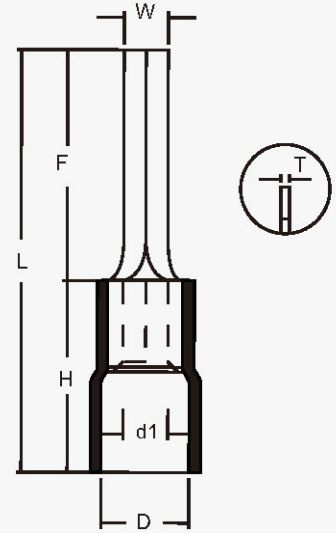

Available range	Single Grip	Double Grip	Dimensions(mm)		
			W	F	L
Cross-section: 0.75-1.5mm² A.W.G.: 22-16 I_{max}=19A Insulator colour: Red Surface handling: Tin / 3μ Annealing: Yes  H=10.0 d1=1.7 D=4 T=0.75	PTV1.25-9	PTVD1.25-9	1.9	9.0	18.8
	PTV1.25-10	PTVD1.25-10		10.0	19.8
	PTV1.25-12	PTVD1.25-12		12.0	21.8
	PTV1.25-13	PTVD1.25-13		13.0	22.8
	PTV1.25-14	PTVD1.25-14		14.0	23.8
	PTV1.25-18	PTVD1.25-18		18.0	27.8
Cross-section: 1.5-2.5mm² A.W.G.: 16-14 I_{max}=27A Insulator colour: Blue Surface handling: Tin / 3μ Annealing: Yes H=10.0 d1=2.3 D=4.5 T=0.8	PTV2-9	PTVD2-9	1.9	9.0	18.8
	PTV2-10	PTVD2-10		10.0	19.8
	PTV2-12	PTVD2-12		12.0	21.8
	PTV2-13	PTVD2-13		13.0	22.8
	PTV2-18	PTVD2-18		18.0	27.8
Cross-section: 4-6mm² A.W.G.: 12-10 I_{max}=68A Insulator colour: Yellow Surface handling: Tin / 3μ Annealing: Yes H=13.0 d1=3.4 D=6.4 T=1.0	PTV5.5-13	PTVD5.5-13	2.8	17.0	27.0
	PTV5.5-18	PTVD5.5-18		18.0	30.5
	PTV5.5-25	PTVD5.5-25		25.0	38.0

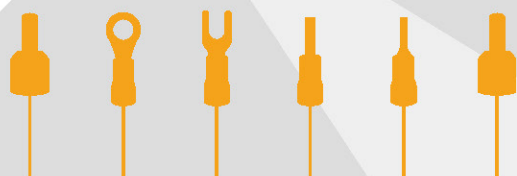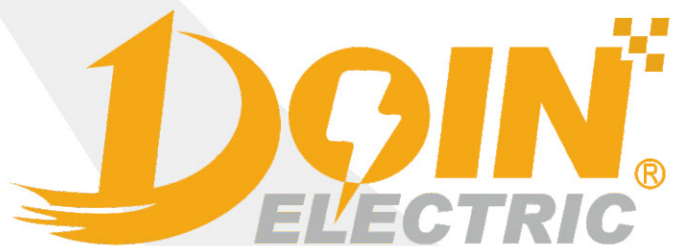

WENZHOU DEXIN ELECTRICTECHNOLOGY CO., LTD

www.doinele.com

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.