


# DOIN ELECTRIC




DEXIN ELECTRIC TECHNOLOGY



[www.doinele.com](http://www.doinele.com)

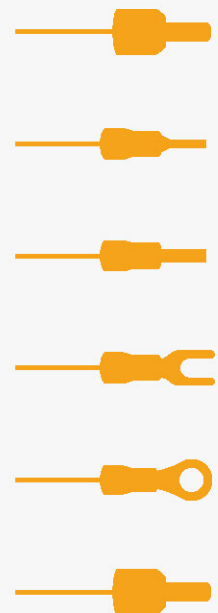

# Female disconnect terminals

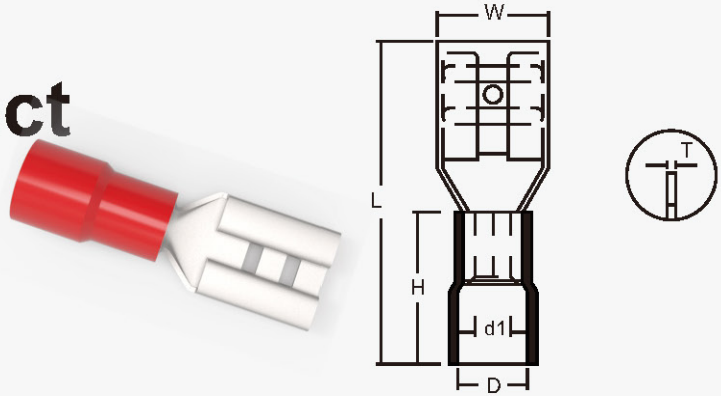

Available range	Single Grip	Double Grip	Tab Size	Dimensions(mm)		
				W	L	T
<b>Cross-section: 0.75-1.5mm<sup>2</sup></b> <b>A.W.G.: 22-16</b> <b>I<sub>max</sub>=10A</b> <b>Surface handling: Tin / 3μ</b> <b>Insulator colour: Red</b>	FDD1.25-110(5)	FDG1.25-110(5)	2.8X0.5	3.2	18.6	0.3
	FDD1.25-110(8)	FDG1.25-110(8)	2.8X0.8			
	FDD1.25-187(5)	FDG1.25-187(5)	4.8X0.5	5.0	19.0	0.35
	FDD1.25-187(8)	FDG1.25-187(8)	4.8X0.8			
	FDD1.25-250	FDG1.25-250	6.35X0.8	6.6	20.5	0.4
<b>Cross-section: 1.5-2.5mm<sup>2</sup></b> <b>A.W.G.: 16-14</b> <b>I<sub>max</sub>=15A</b> <b>Surface handling: Tin / 3μ</b> <b>Insulator colour: Blue</b>	FDD2-110(5)	FDG2-110(5)	2.8X0.5	3.2	18.6	0.3
	FDD2-110(8)	FDG2-110(8)	2.8X0.8			
	FDD2-187(5)	FDG2-187(5)	4.8X0.5	5.0	19.0	0.35
	FDD2-187(8)	FDG2-187(8)	4.8X0.8			
	FDD2-250	FDG2-250	6.35X0.8	6.5	20.5	0.4
<b>Cross-section: 4-6mm<sup>2</sup></b> <b>A.W.G.: 12-10</b> <b>I<sub>max</sub>=24A</b> <b>Surface handling: Tin / 3μ</b> <b>Insulator colour: Yellow</b>	FDD5.5-250	FDG5.5-250	6.35X0.8	6.6	23.5	0.4
	FDD5.5-312	FDG5.5-312	8.0x0.8	9.1	26.5	0.5
	FDD5.5-375	FDG5.5-375	9.4X1.2	10.9	28.6	0.5

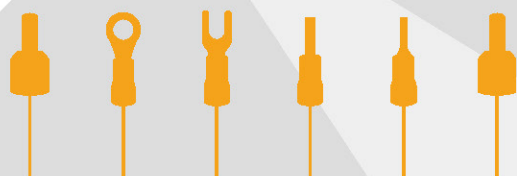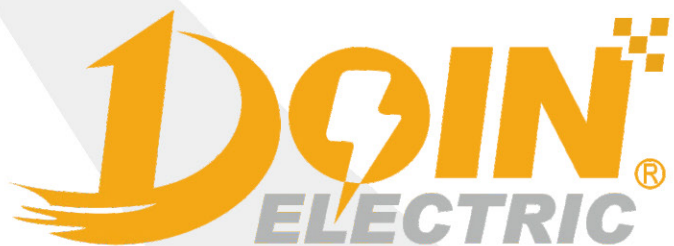

WENZHOU DEXIN ELECTRICTECHNOLOGY CO., LTD

[www.doinele.com](http://www.doinele.com)

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.